

The tool is for revising the printer “code page” and updating program


Precondition: printer driver has already been installed on computer.

● **Revising printer ”code page”:**

1. Open the tool which is in the CD

(\\80 driver and tool\Prj80(Codepage&Program).exe)

2. Operating Prj80(Codepage&Program).exe, as below picture

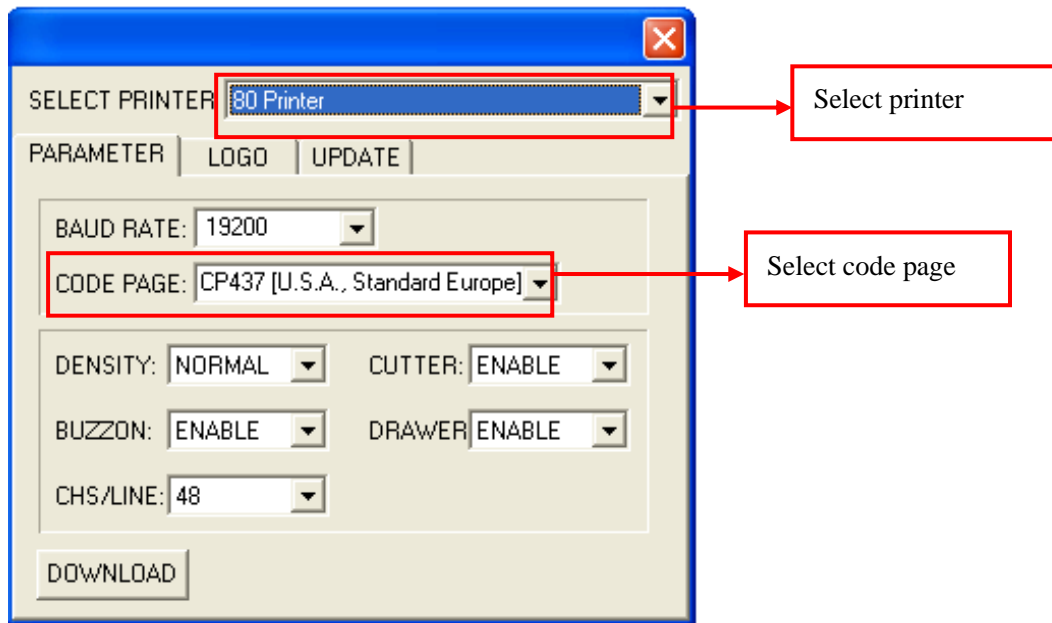

Picture 1


3. “Star → Printer and Fax → 80 Printer property →port” Select port from, “usb, TCP/IP, com, LPT” ,according to the port which user connected with the printer.

4、 On picture1, select printer, such as “80 Printer” →“CODE PAGE” , select one from the dropdown list

5. Click “DOWNLOAD” , and you can check if it is revised successfully by printer self-test page.

● **Updating Program:**

1. Operating Prj80(Codepage&Program).exe, as below picture

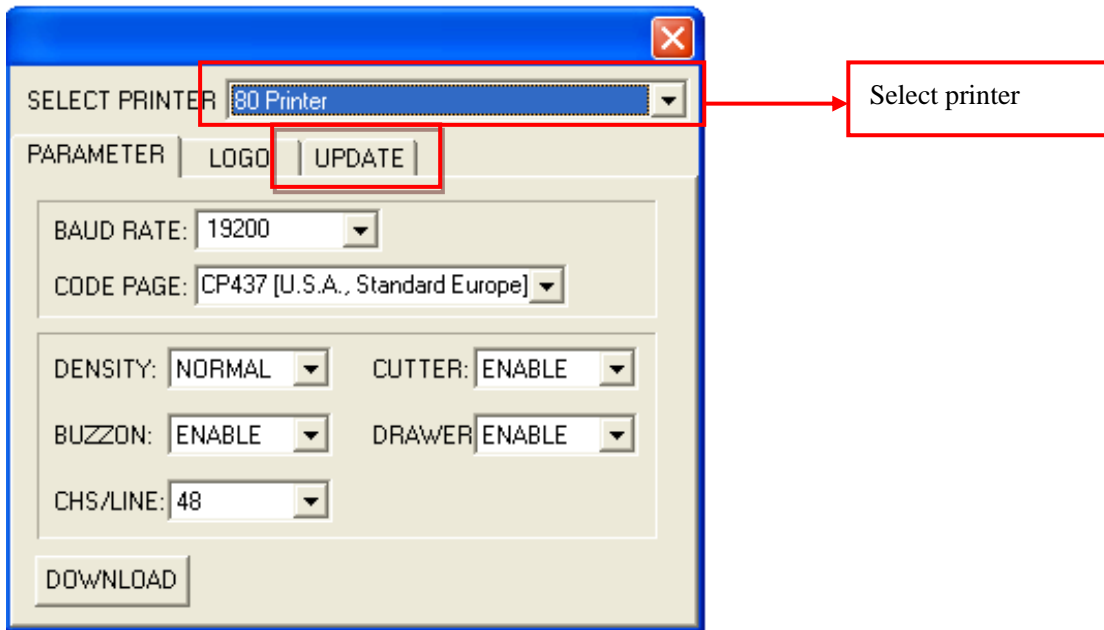


Picture 2

2. “Start →Printer and Fax → 80 Printer Property Port” Select one port from “usb, TCP/IP, com, LPT” , according to the port which user connected with the printer.


3. Select Printer on Picture 2, which is marked with red box

4. Click “UPDATE” on Picture 2, and you can see as below picture 3:

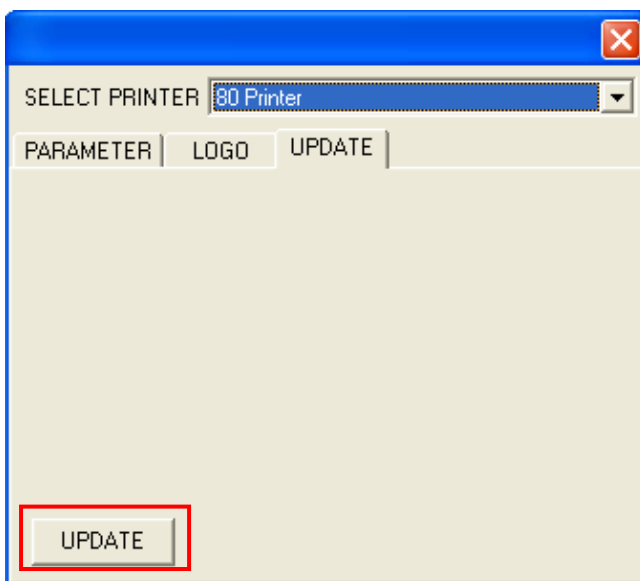


Picture 3

5. Click “UPDATE” on picture 3, and will show as followed picture 4

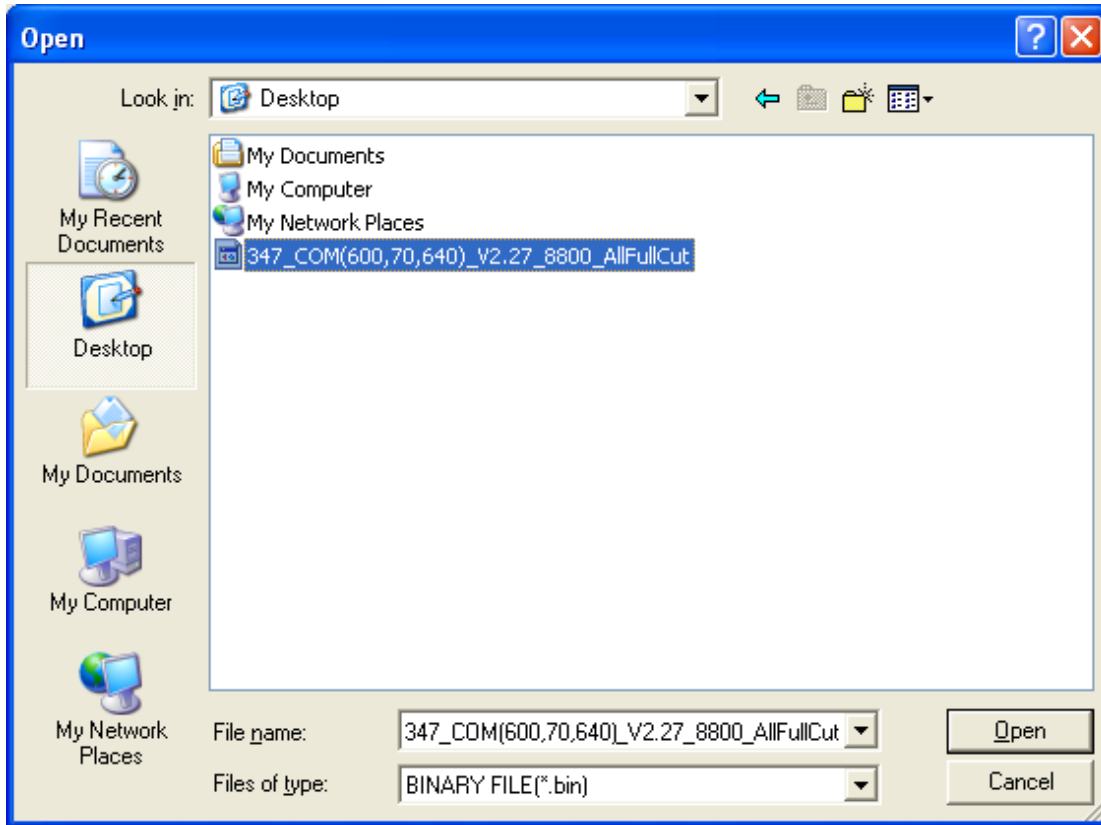

Picture 4

6. Select the location which the updated program would be put to, and you then you would see as the following picture.

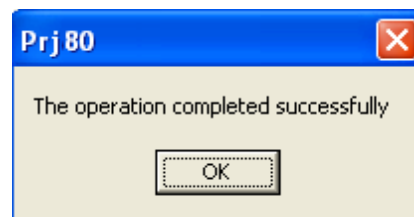

7. Click “OK” on the above picture, and then the program will start to update, after finishing updating, the printer will end with a short “di” sound.